
## 

## Steps:

- 1) Attach Base Plate to bottom of Post, using bolt.
- 2) Slide Plate into top of Post then secure with Bolt.


  NOTE: Tilt Plate must rotate to left and right before installing Shell.
- 3) Attach Shell to Plate, using Hex Nuts.
- 4) Insert Tablet into Shell then feed wire through holes. See details.

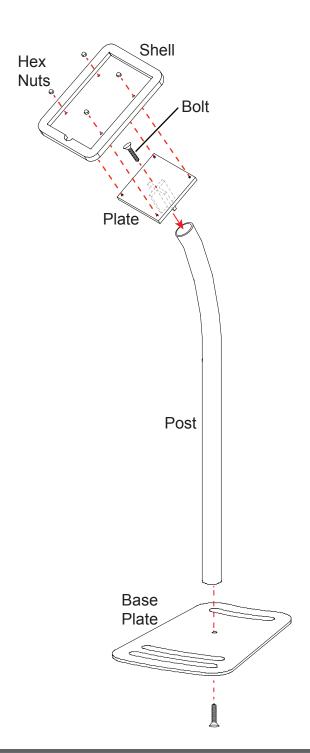


## **Cord Management for Tablet**



Attach Tablet Cord to supplied USB Extension Cord. Feed USB Cord through top hole of Post, then out bottom hole of Post. Connect to Power.



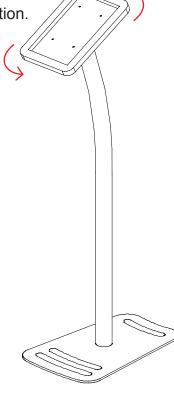

Completed Assembly

1) Hex Wrench



Face Plate

**Bottom Plate** 



Tablet //